



SCAN HERE

# NATURAL PEWTER

**DACOR FLOORS**

Commercial | Healthcare | Student Housing | Multi-Family | Retail

# NATURAL PEWTER

## Ultra Thick Wear Layer Commercial LVT Flooring

### SPECIFICATIONS

Collection: DuraTread  
Width: 7-1/4" (184.15mm)  
Lengths: 48" (1219.2mm)  
Thickness: Overall: 4.5mm  
Wear Layer: 0.7mm (28mil)  
Edge: Micro Bevel  
Surface: UV cured ceramic finish with polyurethane  
Backing: Dry Back  
Packing: 24.167 sf/box (2.2452m<sup>2</sup>)  
10 planks/box | 50 boxes/pallet  
20 pallets/container | 42.33 lbs/box

### INSTALLATION

Method: Glue down (loose lay special order)  
Areas: On Grade, Below & Above Grade

### CARE & MAINTENANCE


For current floor care and maintenance guidelines visit [www.dacorflooring.com](http://www.dacorflooring.com) or contact DacorFlooring at 800-973-7424

### WARRANTIES

25 Year Limited Residential  
10 Year Limited Commercial

### CONTACT & SAMPLES

For more information, scan the QR or visit us at: [www.dacorflooring.com](http://www.dacorflooring.com)  
P: 800-393-7424

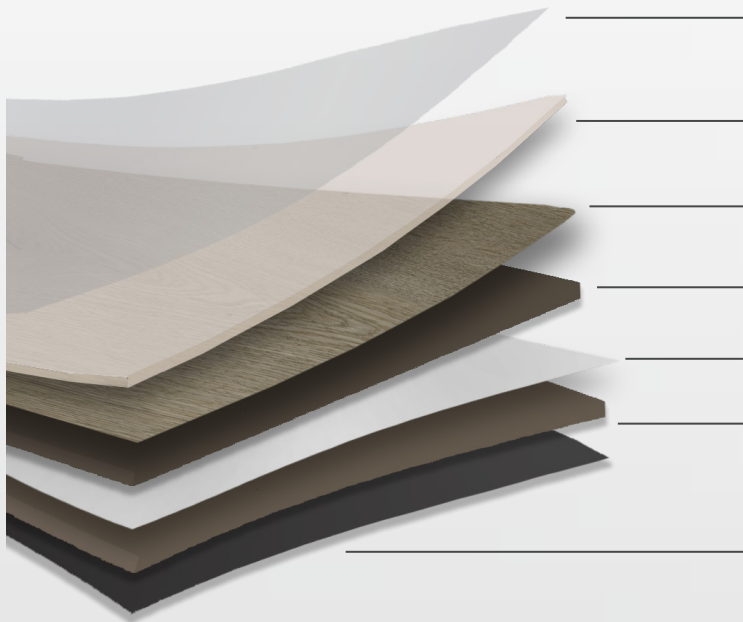

- 1. FINISH:** UV cured ceramic & scratch resistant Polyurethane. Protects surfaces against surface scratches & stains & makes easier to clean
- 2. WEAR LAYER:** 28mil, suitable for heavy duty commercial applications including hospitality, health care, educational and high traffic retail
- 3. DESIGN PATTERN:** High definition unique patterns provide the latest trend in design
- 4. MIDDLE LAYER:** Improves acoustical and comfort performance and provides fire resistance properties
- 5. GLASS FIBER LAYER:** Reduces thermal expansion and contraction for a more stable performance
- 6. HIGHER PERFORMANCE BOTTOM LAYER:** Provides longer lasting properties as well as additional stability
- 7. BACKING:** Dryback. Balances the structure and provide better performance for glue down applications.

